



Web Deploy error codes | Microsoft Docs

https://docs.microsoft.com/en-us/iis/publish/troubleshooting-web-deploy

Bank NAB Bigpond Bmt Business, Investme... Commse Compaccs cPanel

Filter by title

- > Overview
- > Get Started
- > Install
- > Manage
- > Develop
- ▼ Publish
 - > Deploying Application Packages
 - > Using Web Deploy
 - ▼ Troubleshooting Web Deploy
 - Troubleshooting Web Deploy
 - Web Deploy error codes**
 - Troubleshooting Common Problems with Web Deploy
 - Troubleshooting Web Deploy problems with Visual Studio
 - > Using WebDAV
 - > Using the FTP Service
 - > FrontPage Server Extensions
- > Troubleshoot
- ▼ Extensions
 - > Planning for ARR
 - > Installing Application Request Routing (ARR)
 - > Configuring Application Request Routing (ARR)
 - > Troubleshooting Application

Diagnosis: The specified application does not exist.

Resolution: Check IIS Manager to make sure the name of the application path is correct.

ERROR_USER_NOT_AUTHORIZED_FOR_DBFUI

ERROR_USER_NOT_AUTHORIZED_FOR_DBMY
ERROR_USER_NOT_AUTHORIZED_FOR_SETAC
ERROR_USER_NOT_AUTHORIZED_FOR_APPPC
ERROR_USER_NOT_AUTHORIZED_FOR_APPPC
ERROR_USER_NOT_AUTHORIZED_FOR_RECYC
ERROR_USER_NOT_AUTHORIZED_FOR_CREAT
ERROR_USER_NOT_AUTHORIZED_FOR_CONT

The group of errors listed above share the following workaround:

Diagnosis: A non-administrative user attempted to use a Web Deploy provider for which the user is not authorized.

Resolution: Web Deploy 2.0 setup, by default uses Delegation Rules which allow non-administrative users to use this provider. It is possible that a delegation rule has not been setup correctly.

Workaround: From the Programs Control Panel, create the delegation rule manually. Alternatively, create the delegation rule manually.

ERROR_USER_NOT_AUTHORIZED_FOR_DBFUI

Diagnosis: A non-administrative user attempted to use a Web Deploy provider for which the user is not authorized.


troubleshooting Application

Request Routing

Download PDF

a Web Deploy provider for which the user is r
error code surfaces if the user attempts to pe
provider for which Web Deploy 2.0's setup dc



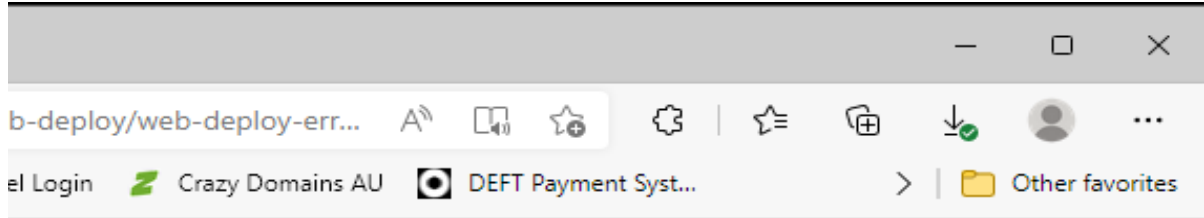

t exist in IIS.

you have correctly specified the

AUTHORIZED_FOR_IISAPP,

- LLSQL,
- 'SQL,
- .L,
- DOLNETFX,
- DOLPIPELINE,
- LEAPP,
- TEAPP,
- ENTPATH

llowing diagnosis, resolution and

ted to perform an operation with
not currently authorized.

; creates Management Service
tors to perform operations with
ule required for this provider has

el, run Repair on Web Deploy 2.0.
ally.

AUTHORIZED_FOR_DEPLOYMENTPROC

ted to perform an operation with

not currently authorized. This
perform an operation with a
does not create a delegation rule.



The image shows a Windows taskbar with the following elements from left to right: a help icon (question mark), a weather widget showing 28°C and 'Partly sunny', a system tray containing icons for network, volume, and power, the language 'ENG', the date and time '12:31 PM 12/04/2022', and a notification icon with a '3' badge.

