

The screenshot shows the Microsoft Visual Studio IDE interface. The title bar includes the VS logo, File, Edit, View, Git, Project, Build, Debug, Test, Analyze, Tools, Extensions, and Window. The toolbar has icons for Back, Forward, Home, Save, and others. The status bar at the bottom shows 100% zoom, 0 errors, 1 warning, and various navigation icons.


The main area displays the code for `Startup.cs` in a .NET Core Web Application:


```
7   using System;
8   using System.Collections.Generic;
9   using System.Linq;
10  using System.Threading.Tasks;
11  using WebApplication6.Models;
12  using System.Data.SqlClient;
13
14  namespace WebApplication6
15  {
16      public class Startup
17      {
18          public Startup(IConfiguration configuration)
19          {
20              Configuration = configuration;
21          }
22
23          public IConfiguration Configuration { get; }
24
25          // This method gets called by the runtime. Use this method to add
26          // services.
27          public void ConfigureServices(IServiceCollection services)
28          {
29
30              string connectionstring = Configuration.GetConnectionString("P
31              services.AddDbContext<PaymentContext>(options =>options.UseSql
32              services.BuildServiceProvider().GetService<PaymentContext>().D
33
34              services.AddControllersWithViews();
35
36          // This method gets called by the runtime. Use this method to conf
37          // services.
38          public void Configure(IApplicationBuilder app, IWebHostEnvironment
39          {
40              if (env.IsDevelopment())
41              {
42                  app.UseDeveloperExceptionPage();
43              }
44          }
45      }
46  }
```

The code editor highlights several lines in green, likely indicating code that is part of the generated template or is being modified.

The Error List window at the bottom shows one error:

Code	Description
Deploy Provider is "dbFullSql"). ...	WebApplication6
vider is "dbFullSql").	
ator has not authorized the user for this operation. dbFullSql http://go.microsoft.com/fwlink/?LinkId=178034 Learn	

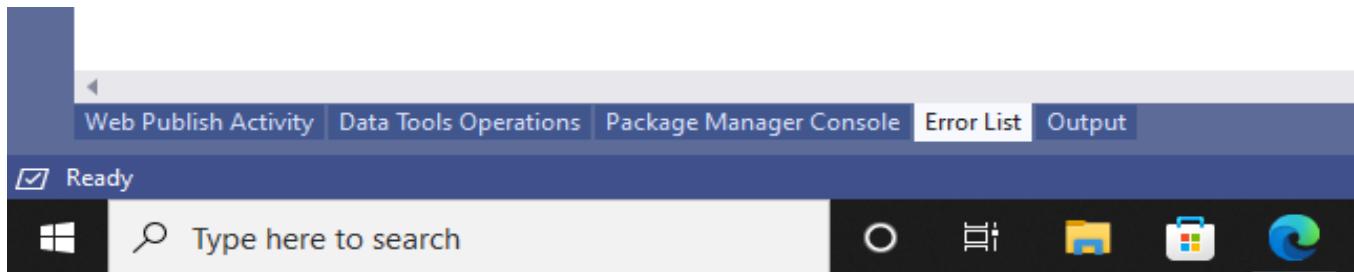

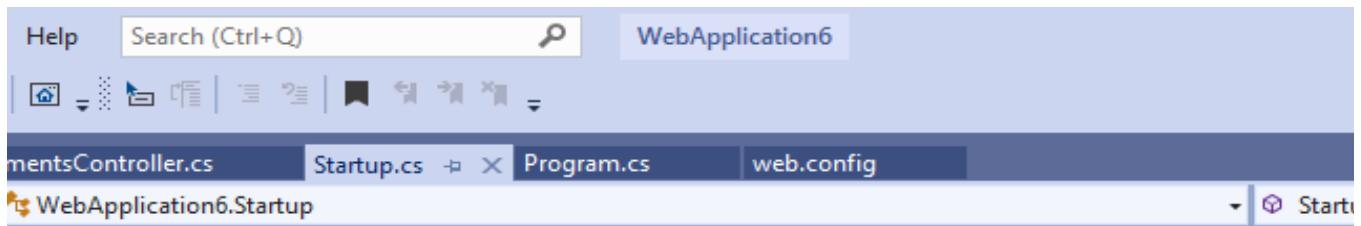



```
services to the container.
```

```
        paymentConnection");
    Server(connectionstring));
    database.Migrate();
```

```
figure the HTTP request pipeline.
```

```
: env)
```

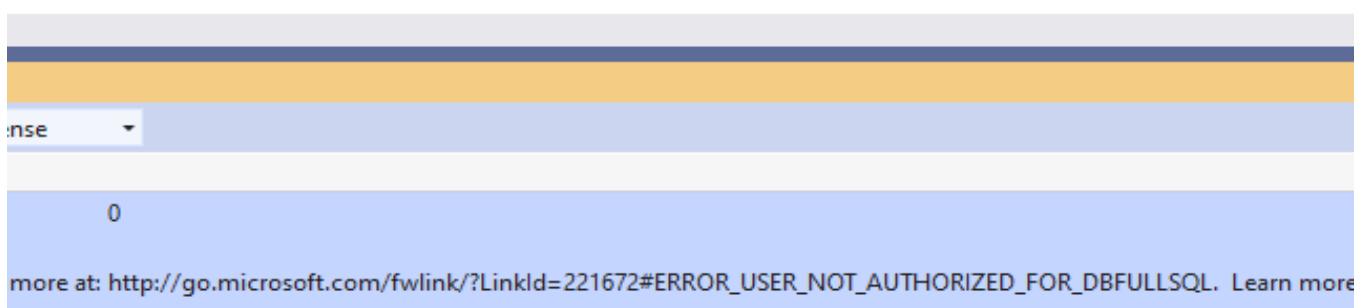

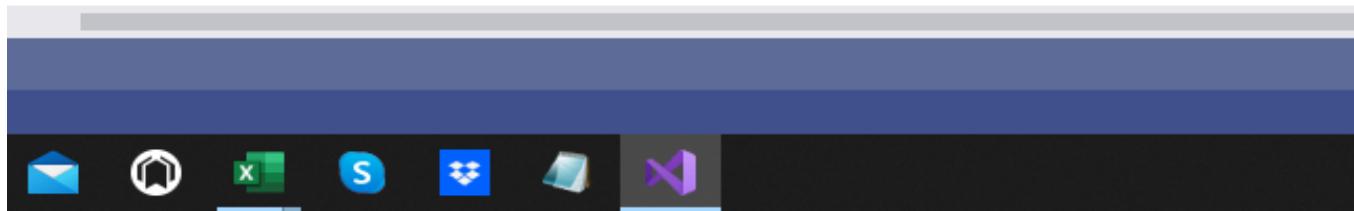

The screenshot shows the Microsoft Visual Studio IDE interface. The main window displays a code editor with the file "WebApplication6.csproj" open. The code contains a single line of C#:

```
up(IConfiguration configuration)
```

The status bar at the bottom indicates the current position is Line 19, Column 10, with SPC and CRLF settings.

On the right side of the interface, the "Error List" window is visible, which is highlighted with a yellow background. It contains the following error message:

Severity Code Description Project File Line Suppression State  
Error CS1061 'IConfiguration' does not contain a definition for 'up'. You may need to add a reference to assembly 'System.Configuration.ConfigurationManager, Version=4.0.0.0, Culture=neutral, PublicKeyToken=b03f5f7f11d50a3a'. (R) at: https://go.microsoft.com/fwlink/?LinkId=221672#ERROR\_USER\_NOTAUTHORIZED\_FOR\_DBFULLSQL.)

